SILVERSTONE®
Designing Inspiration

TREASURE SERIES
TS02B manual

EXTERNAL 2.5” HDD ENCLOSURE

Specifications:

Model No.	SST-TS02B
Enclosure Material	Aluminum.
Color	Black.
Power Requirement	5Vdc.
Drive Size Support	2.5” hard drive.
Drive Interface Support	SATA hard drive.
Hard Disk Support	Support up to 1TB Hard Disk and beyond *
Enclosure Interface	eSATA (Max. 3Gbits) USB2.0 (Max. 480Mbits)
Operating System Support	Windows 2000, XP, Vista, Mac OS and Linux.
Net Weight	125 g
Dimension	128mm(D) x 82mm(W) x17mm(H)
Minimum System Requirements	Windows 2000/XP, and Windows Vista Mac OS 9.x (Apple USB support 1.3.5 and greater) and Mac OS 10.1, 10.2, 10.3, and 10.4 Mac：G3 processor or greater Computer with eSATA or USB 2.0/1.1 interface. PC：Intel Pentium 233MHz-compatible processor or greater Minimum 32MB RAM.

*TS02 can theoretically support any hard drive capacity recognized by your PC, however, drive beyond 1 TB were unavailable for testing at the time of product release

INSTALLATION GUIDE

1.

Remove the two screws from the I/O panels.

DEUTSCH
Entfernen Sie die beiden Schrauben der I/O Blende

ESPAÑOL
Quite los dos tornillos de los paneles de E/S

FRANÇAIS
Retirez les 2 vis du panneau d’entrée/sortie

ITALIANO
Rimuovere le due viti dal pannello I/O

русский
Выньте два шурупа на панели ввода/вывода.

한국어
I/O 패널에서 두개의 나사를 제거합니다.

日本語
I/Oパネルからネジ2本を外します

繁體中文
卸下I/O面板上的兩顆螺絲

简体中文
卸下I/O面板上的两颗螺丝

2.

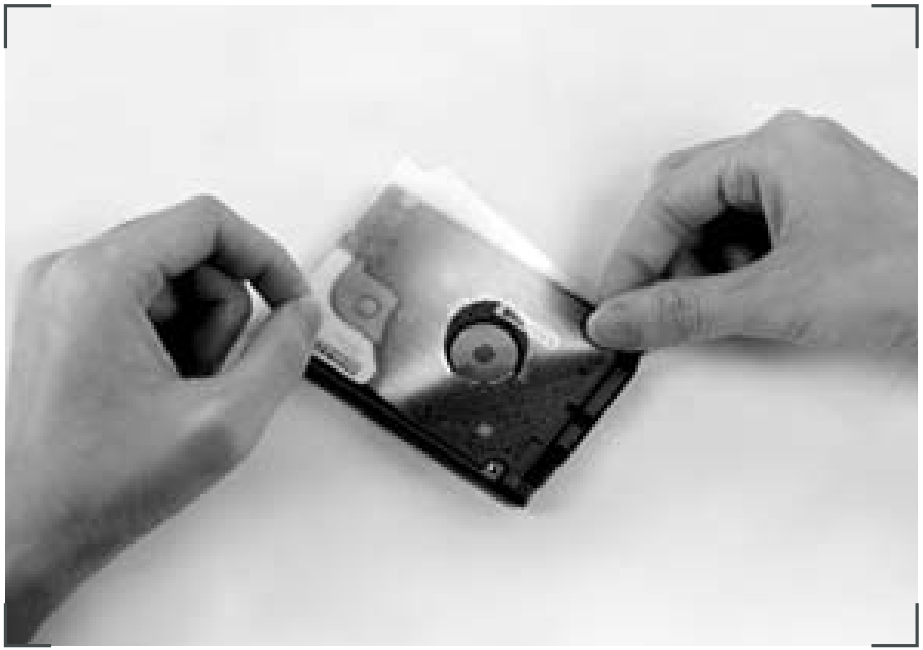

Attach the included mylar film as shown.

DEUTSCH
Bringen Sie den beigefügten Schaumstoff wie gezeigt an

ESPAÑOL
Instale los paneles de mylar película que se incluyen como se muestra

FRANÇAIS
Collez l’ mylar film inclus comme montré

ITALIANO
Applicare le mylar film in dotazione come mostrato

русский
Прикрепите прилагаемые майларовая фильм, как показано на рисунке.

한국어
그림에서와 같이 동봉된 MYLAR 필름을 부착합니다.

日本語
図のように付属のマイラーフィルムを取り付けます

繁體中文
依圖示將絕緣片貼上

简体中文
依图示将绝缘片贴上

3.

Connect your 2.5” hard drive carefully to the SATA connector on the PCB.

DEUTSCH

Verbinden Sie die 2,5" Festplatte vorsichtig mit dem SATA Anschluss an der Platine

ESPAÑOL

Conecte con cuidado su disco duro de 2,5” al conector SATA del PCB

FRANÇAIS

Branchez votre disque dur 2.5” délicatement au connecteur SATA situé sur le PCB

ITALIANO

Connettere con la dovuta cautela l’hard disk da 2,5” al connettore posto sul PCB

русский

Осторожно подключите ваш 2,5-дюймовый жесткий диск к SATA-разъему печатной платы.

한국어

PCB에 있는 SATA 커넥터를 2.5” 하드드라이브를 조심스럽게 연결합니다.

日本語

2.5”ハードディスクドライブをPCB上のSATAコネクタに確実に接続します。

繁體中文

將您的2.5”硬碟小心地插入PCB板上的SATA接頭

简体中文

将您的2.5”硬盘小心地插入PCB板上的SATA接头

4.

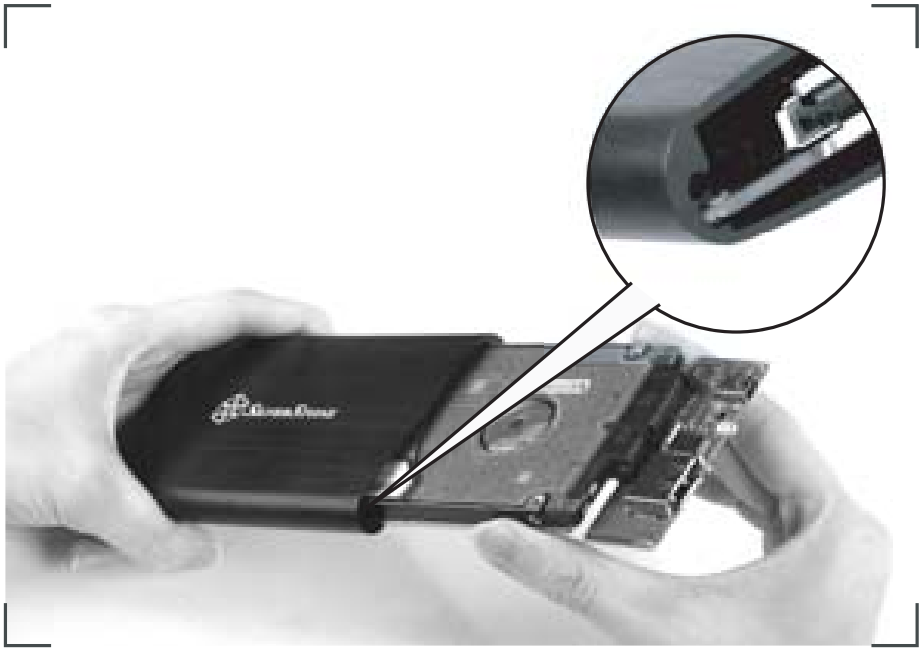

Insert the hare drive and PCB into TS02 aluminum case.
Please make sure the PCB slide into the guiding groove.

DEUTSCH
Setzen Sie die 2,5" Festplatte und die Platine in das TS02 Aluminium Gehäuse ein.
Bitte stellen Sie sicher, dass sich die Platine in die Führungsnut einschiebt.

ESPAÑOL
Inserte el disco duro y PCB en la caja de aluminio del TS02.
Compruebe que el PCB se desliza en su lugar.

FRANÇAIS
Insérez le disque dur et le PCB dans le boîtier en aluminium du TS02.
Veuillez bien vérifier que le PCB glisse correctement dans le rail du boîtier.

ITALIANO
Inserire l’hard disk ed il PCB nel box in alluminio TS02.
Assicurarsi che il PCB scivoli nella specifica guida.

русский
Вставьте жесткий диск и печатную плату в алюминиевый корпус TS02.
Убедитесь, что печатная плата попала в направляющие пазы.

한국어
T02 알루미늄 케이스에 하드 드라이브와 PCB를삽입합니다.
가이드 홈에 PCB가 미끄러질 수 있도록 확인합니다.

日本語
ハードディスクドライブとPCBをTS02
アルミニウムケースに入れます。
PCBはガイド溝にスライド式に入れてください。

繁體中文
將硬碟與PCB板插入TS02外接盒中.
請確認PCB板正確地插入導軌中.

简体中文
将硬盘与PCB板插入TS02外接盒中
请确认PCB板正确地插入导轨中

5.

Reinstall the I/O panel and secure with screws (step1).

DEUTSCH
Setzen Sie die I/O Blende wieder ein und befestigen Sie diese mit den beiden Schrauben (siehe Schritt 1)

ESPAÑOL
Reinstale el panel de E/S y fíjelo con tornillos (paso 1)

FRANÇAIS
Remettez le panneau d’entrée/sortie et fixez-le avec les vis retirées lors de l’étape 1

ITALIANO
Reinstallare il pannello I/O e serrarlo con le viti

русский
Установите на место панель ввода/вывода и закрепите шурупами (этап 1).

한국어
I/O 패널을 재 설치하고 나사
(STEP1)로 고정합니다.

日本語
I/Oパネルを戻し、ネジで固定します
（ステップ1）

繁體中文
將I/O面板裝回並以螺絲鎖固（步驟一）

简体中文
将I/O面板装回并以螺丝锁固（步骤一）

SilverStone Technology Co., Ltd.

www.silverstonetek.com

G11209730